


# SANYO

## Cadnica

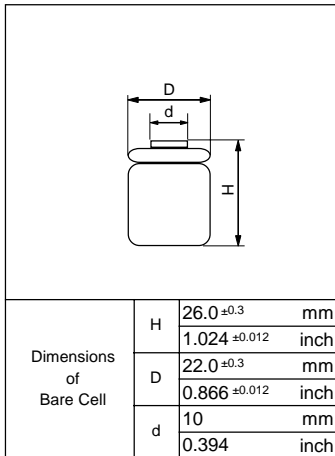


## Cell Type CP-1300SCR Specifications


Nominal Capacity		1300mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	130mA	
	Fast	1950mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	5°C to +40°C [+41°F to 104°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		6.5mΩ (at 1000Hz)	
Weight		35g/1.23oz	
Dimensions(D)x(H) (with tube)		22.9 <sup>0</sup> <sub>-1</sub> × 26.7 <sup>0</sup> <sub>-0.9</sub> mm	
		0.90 <sup>0</sup> <sub>-0.04</sub> × 1.05 <sup>0</sup> <sub>-0.04</sub> inch	

### Typical Characteristics


#### Charge

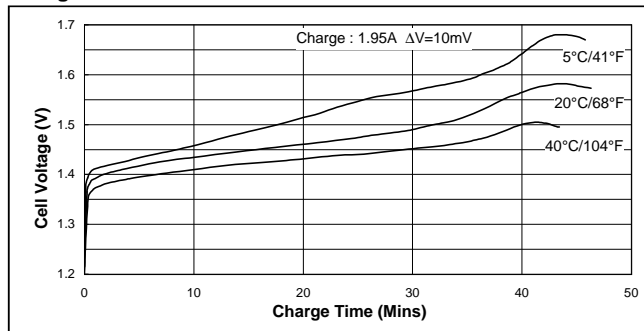


#### Discharge (at high rate)

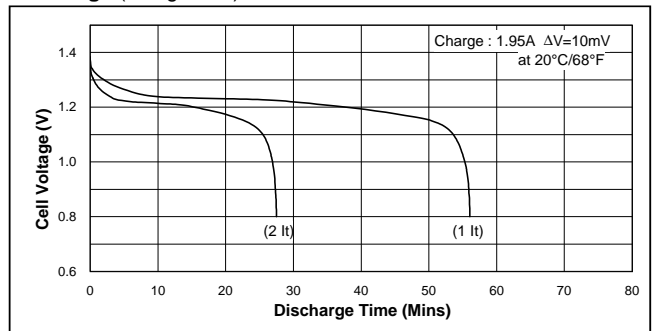


#### Cell capacity (at various discharge rate)

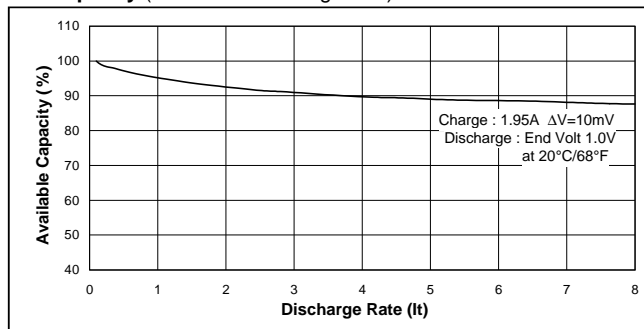

#### Discharge (at high rate)

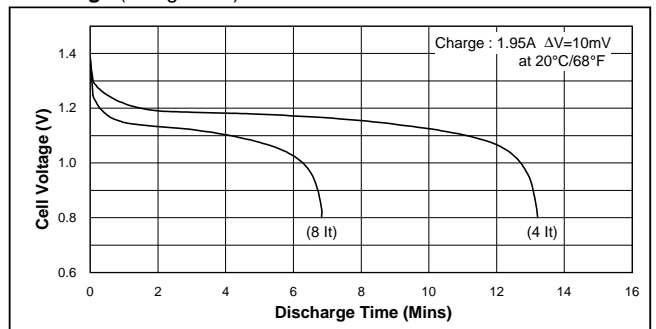

#### Discharge (at low rate)

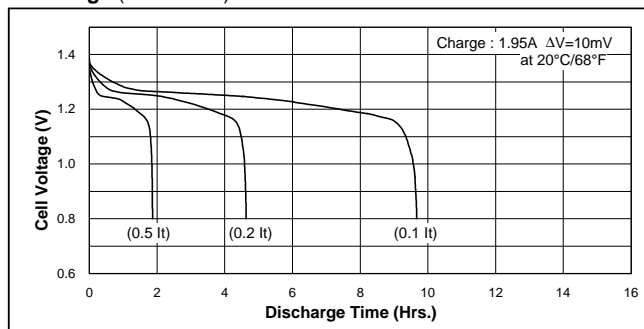

#### Temperature (Charge & Discharge)

