


ENERGIZER NO. CRV3 (ELCRV3)



Typical Dimensions in mm (inches)

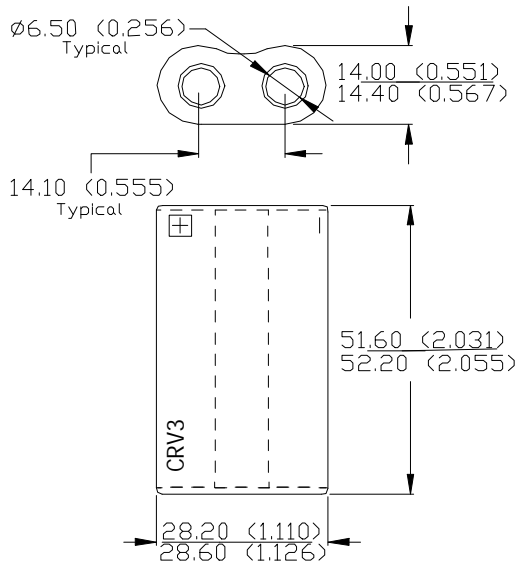


This battery Contains a Positive Temperature Coefficient (PTC) Device to Limit Current Flow


Chemical System: Lithium
Lithium/Iron Disulfide (Li/FeS₂)

Designation: Not Issued Yet
Battery Voltage: 3.0 Volts
Average Weight: 32 grams (1.1 oz.)
Volume: 24.0 cubic centimeters (1.5 cubic inch)
Average Capacity: 3000 mAh to 2.0 volts
(Rated Capacity at 10 mA at 21°C)
Temp Range: -40°C to 60°C
Max Discharge: 2000 mA continuous
Cells: Two-15LF in series

Typical Discharge Characteristics
Schedule: 24 hours / day

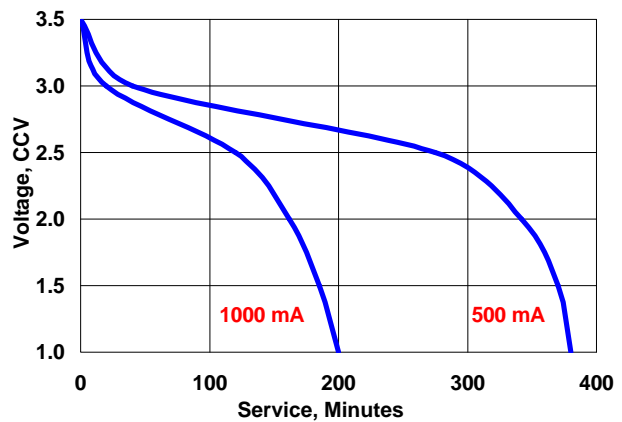

Typical Discharge Characteristics
Schedule: 24 hours / day

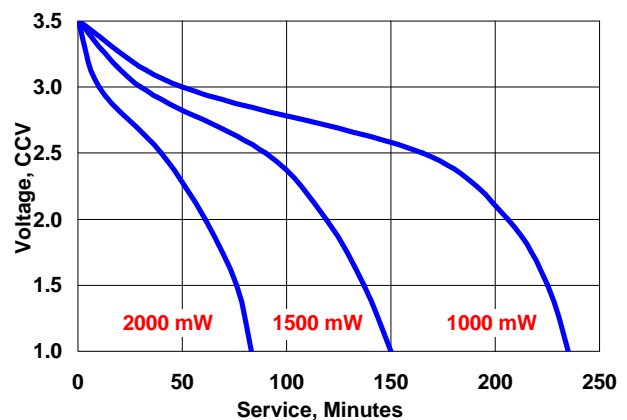

Simulated Application Test
Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 2.4V (milliamperes)	Cutoff Voltage 2.0V
24 hours/day	500	342 Min
24 hours/day	1000	162 Min

Schedule:	Typical Drains at 2.4V (milliwatts)	Cutoff Voltage 2.0V
Constant Power	1000	206 Min
Constant Power	1500	119 Min
Constant Power	2000	61 Min

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved