

# HIGH TEMPERATURE SERIES

## Nickel-Metal Hydride

### VHT AA

The new Ni-MH VHT range has been especially designed to fit the emergency lighting and power back-up requirements. This range complements the Ni-Cd VT range.

The VHT AA cell is designed to accept a permanent charge in high temperature environments such as security lighting equipment. The VHT AA offers capacities of 1.1 Ah to fit the needs for energy, required by security and lighting devices.

To meet customers requirements, Saft provides custom-designed and standardized battery packs.

For your battery design and system needs, please contact Saft's engineers.

#### Applications

- Emergency lighting
- Professional lighting
- Power back-up systems

#### Main advantages

- Good charge efficiency at high temperatures
- Permanent charge
- Excellent storage retention

#### Technology

Foam positive electrode  
Metal-hydride negative electrode

#### Temperature range in discharge

+ 5°C to + 55°C

#### Storage

Recommended: - 5°C to + 25°C  
Relative humidity: 65 ± 5%

Data are given for single cells

Please consult Saft for utilization of cell outside this specification.



#### Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	1150
IEC rated capacity (mAh)*	1100
IEC designation	HRT 15/21
Impedance at 1000 Hz (mΩ)	18

\* Charge 16h at C/10, discharge at C/5

#### Dimensions

Diameter (mm)	13.9 ± 0.10
Height (mm)	48.9 ± 0.3
Top projection (mm)	0.7 ± 0.2
Top flat area diameter (mm)	5.6 ± 0.1
Weight (g)	26

Dimensions are given for bare cells

#### Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Standard	16	+ 5 to + 45	110

End of charge cut-off is requested: -dV method, 5mV/cell

The maximum battery temperature recommended during charge is + 45°C

#### Maximum discharge current

Continuous (A) at + 20°C	1.1
Peak (A) at + 20°C*	5

\* Peak duration: 0.3 second - final discharge voltage 0.6 volt/cell



S A F T

# HIGH TEMPERATURE SERIES


Nickel-Metal Hydride

VHT AA



## Typical performances

For graphs shown, C is the IEC5 capacity

### Charge efficiency at + 40°C in permanent overcharge

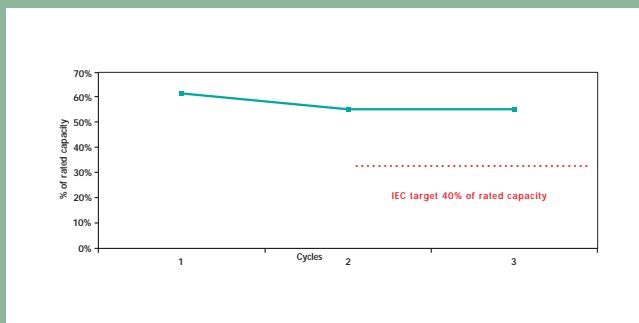

### Charge efficiency at + 55°C in permanent overcharge

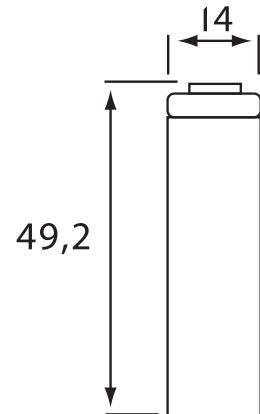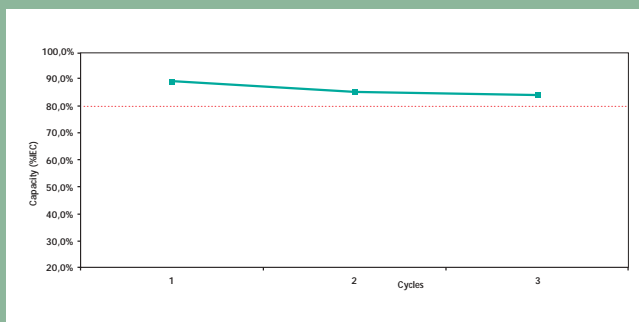

## Saft

### Rechargeable Battery Systems

12, rue Sadi Carnot

93170 Bagnolet - France

Phone: +33 (0)1 49 93 19 18

Fax: +33 (0)1 49 93 19 68

Email: [rbs.info@saft.alcatel.fr](mailto:rbs.info@saft.alcatel.fr)

DOC. N° 11081-2-0303

Published by the Communication Department

[www.saftbatteries.com](http://www.saftbatteries.com)

Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.

