



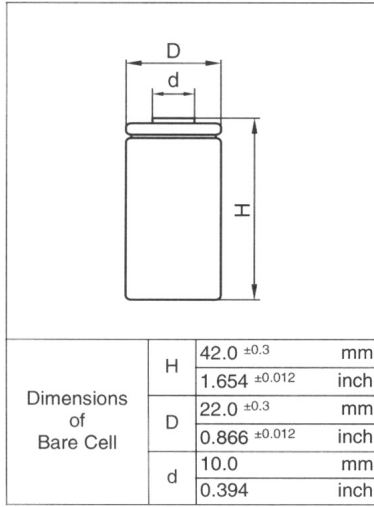

Cadnica

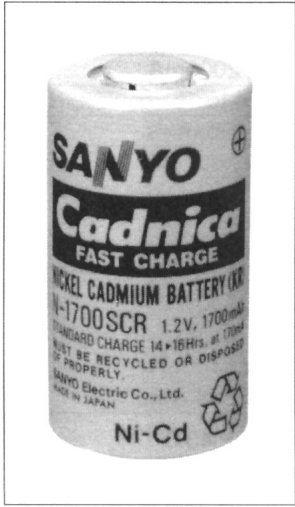


Cell Type N-1700SCR

Specifications


Nominal Capacity		1700mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	170mA	
	Fast	2600mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Fast	5 to 40 °C [41 to 104 °F]
	Discharge		-20 to 60 °C [-4 to 140 °F]
	Storage		-30 to 50 °C [-22 to 122 °F]
Internal Impedance(Av.) (at 50% discharge)		4mOhms (at 1000Hz)	
Weight		54g/1.9oz	
Dimensions(D)x(H) (with tube)		23.0 ⁰ ₋₁ x 43 ⁰ _{-1.5} mm 0.91 ⁰ _{-0.04} x 1.69 ⁰ _{-0.06} inch	

Typical Characteristics


Charge Characteristics (5 cells pack)

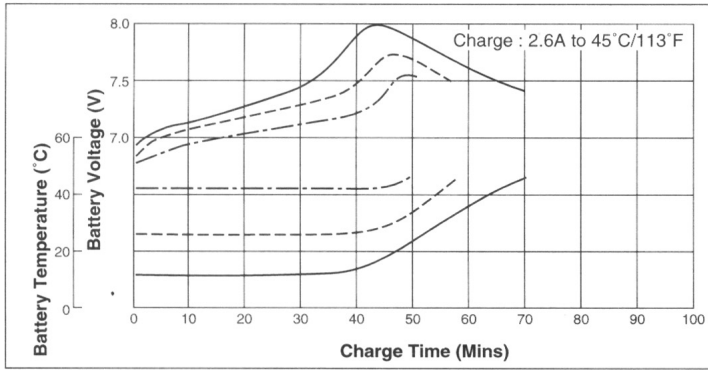


Discharge (at high rate)

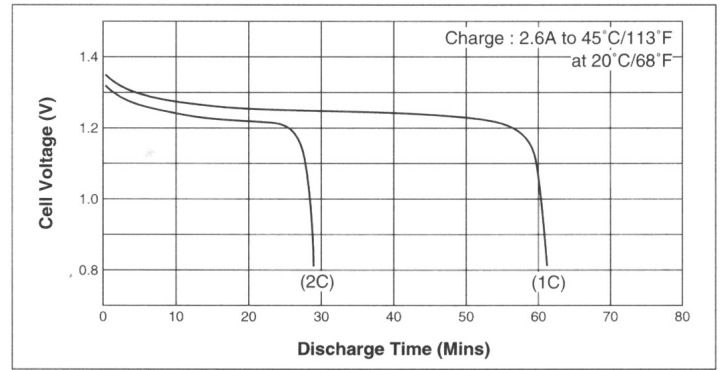


Cell Capacity (at various discharge rate)

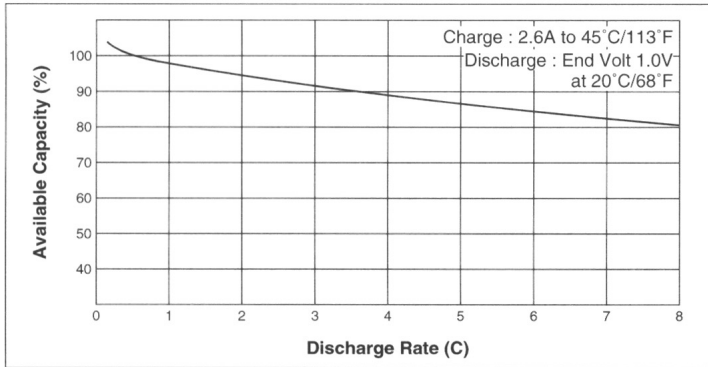

Discharge (at high rate)

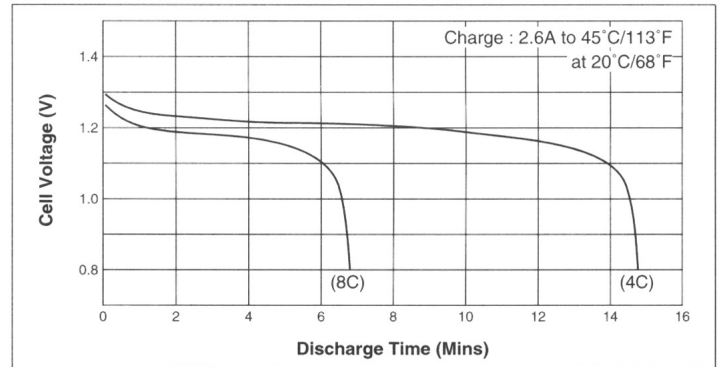

Discharge (at low rate)

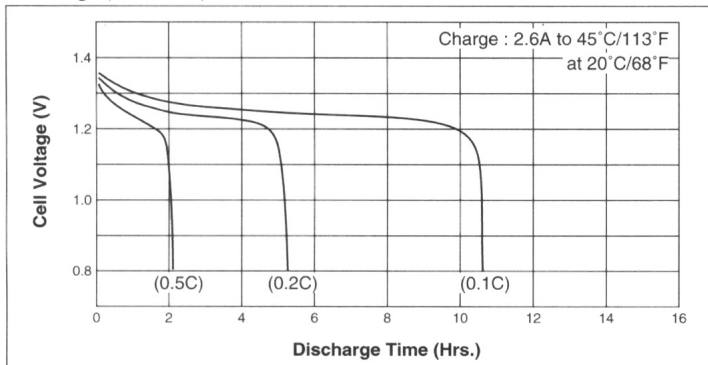

Temperature (Charge & Discharge)

